
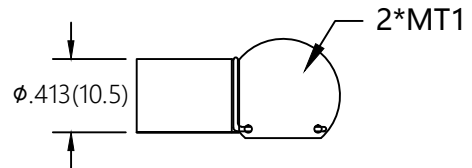



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

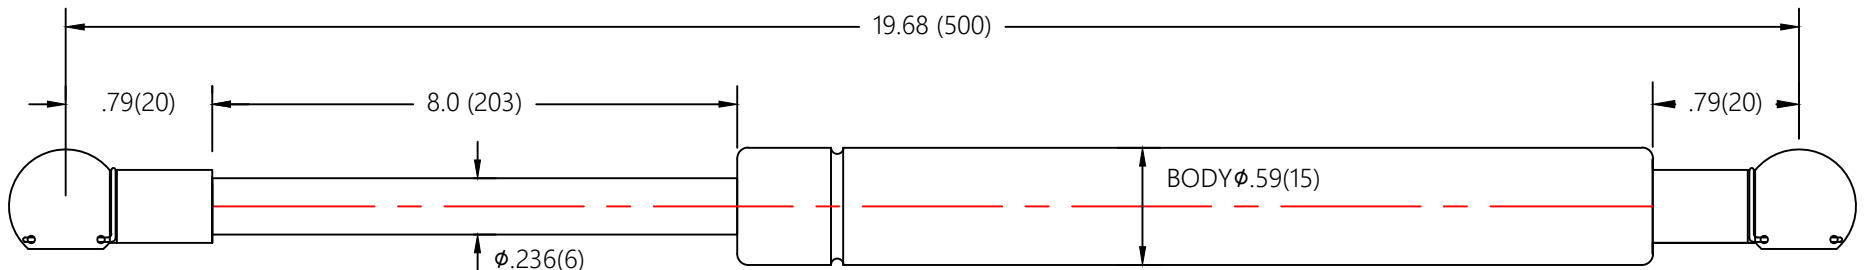

- NOTES
1. MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE
  2. FORCE: 20LBS/ 89N
  3. Dimensions assuming end connectors are fully screwed into place
  4. Drawing lengths (not dimensioned) of cylinder and rod bodies are not to scale
  5. Operating temperature: -30°C TO +80°C
  6. Standard label to include part number, date code, and warning message. Label not to be remove
  7. Gas Spring not to be modified, or changed from manufactured, original, product
  8. Gas Spring is suggested to be mounted shaft down (rod down) for maximum performance
  9. Connectors to be lined up per drawing. 5 degree division permitted
  10. Gas Springs will be individually packed in sealed clear plastic bags, to avoid damage, dust, or other foreign material objects
  11. Gas Spring to be assembled per the drawing with end fittings assembled / fastened
  12. Gas Springs are not to be opened
  13. Inside of each end fitting to be greased

<b>NORMONT</b>	DRAWN		NAME	DATE
	CHECKED		FAITH	10/9/20
	DWG NO			REV
	NSG1968S20MT1			0
TITLE				
<b>Gas Spring</b>				
TOLERANCES		THIRD ANGLE		SCALE
X.X	± 0.060	PROJECTION		N.T.S.
X.XX	± 0.030			SIZE
X.XXX	± 0.015			
ANGLES	± FE	SHEET 1 OF 1		B
HOLES	± 0.005			
REMOVE ALL BURRS & BREAK ALL SHARP EDGES	ALL DIMENSIONS ARE IN <b>Inch</b> UNLESS OTHERWISE SPECIFIED			